




Specification


Type	DTE-Z73	DTE-Y59A	DTE-Y7P
Wiring system	Two wire type	Three wire type	
Switching logic	Reed switch	NPN Current sinking	PNP Current sourcing
Operating voltage	DC 5 ~ 240 V	DC 10 ~ 30V	
Switching current	100mA max.	100mA max.	
Switching rating	10W max.	3W max.	
Internal voltage drop	3.5V max.	1.5V max.	
Indicator lamp	Red LED	Red LED	Yellow LED
Cable	φ 3.3, 2C, PVC	φ 3.3, 3C, PVC	
Temperature range		-10°C ~ 70°C	
Enclosure classification		IEC529 IP67	
Protection circuit	None	Reverse polarity, short-circuit ; Surge suppression	

Connect diagram


● DTE-Z73



● DTE-Y59A

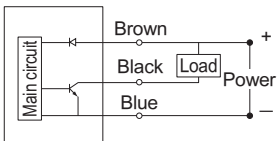


● DTE-Y7P

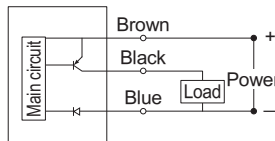


Pinout


● Two wire type(QD)




● Three wire type(QD)

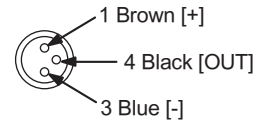

DTE-Y59A / DTE-Y7P Standard and wiring / Dimension

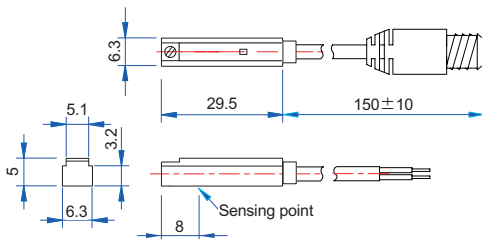

DTE-Z73 Standard and wiring / Dimension

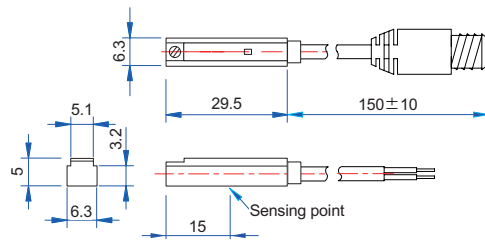

Cylinder mode

DKHL